


Fig.291

Plain Plug

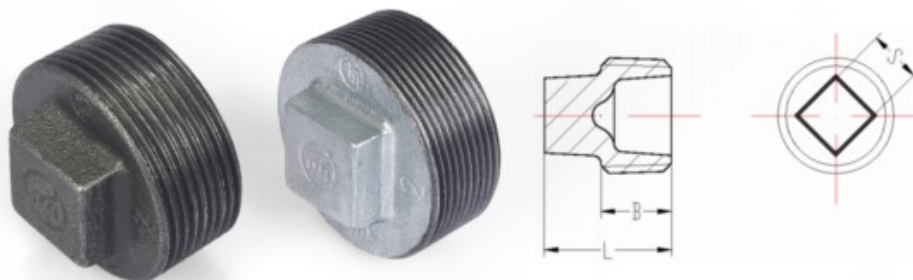

Fitting Size, Weight and Package

Code	Size		L	B	S	Unit Weight		Packing
						Black	Galv.	Carton
	NPS	DN	mm	mm	mm	g	g	Pcs/ctn
JZGAL29101	1/4"	8	15.5	10	6	8.82	9	2400
JZGAL29102	3/8"	10	17	10	7	15.68	16	2200
JZGAL29103	1/2"	15	22.5	13	10	24.5	25	1400
JZGAL29104	3/4"	20	24	14	12	36.26	37	800
JZGAL29105	1"	25	27	16.5	15	57.82	59	500
JZGAL29106	1-1/4"	32	30	20	18	103.88	106	300
JZGAL29107	1-1/2"	40	31	21	22	140.14	143	200
JZGAL29108	2"	50	36	25	26	230.3	235	120
JZGAL29109	2-1/2"	65	40.5	26.5	30	348.88	356	72
JZGAL29110	3"	80	45.5	29.5	34	512.54	523	64
JZGAL29111	4"	100	57	38	44	978.04	998	36
JZGAL29112	6"	150	65	42	65	/	/	/

Pipe Fitting Standards and Technical Data

	CE	FM/UL	ABNT	ISO	BS	DIN	ISI
Standard	EN10242	ANSI/ASME B16.3 B16.14 B16.39	NBR6943	ISO49	BSEN10242	DIN2950	IS1879
Thread	EN10226	ANSI/ASME B.1.20.1 Or NPT	NBR NM – ISO7 - 1	ISO 7-1* ISO 228*	BSEN10226 Or PT	DIN2999	IS554

Technical
Data

Working pressure: 25 BAR/ 363PSI/ 2.5MPA/ CLASS 150/ PN25
 Temperature: 200°C (392°F)
 Tensile Strength: ≥350MPA
 Elongation: ≥10%
 Hardness: ≤HB150

*ISO7-1 is for pressure-tight joints on the threads, ISO228 is for pressure-tight joints not on the threads.