



UNIVERSAL BEAM CLAMP, THICK FLANGE, ELECTROGALV. 3/8" ROD, 1 1/4" MAX FLANGE

#! 1! *- ' , 2+ " %

3100037EG



#% 1)&#! 1)- , 0



&% 12/ %

Universal beam clamp for thick beams


. / - \$2#1 ! 11/)" 21%

Material: Cast Iron
Finish: Electrogalvanized
Rod Size: 3/8"
Flange Thickness: 1 1/4" Max
A: 1"
Torque: 5 ft lb
Static Load 1: 500 lb
Static Load 2: 250 lb

! \$\$)1)- , ! * . / - \$2#1 \$%!)*0

Setscrew must be tightened and torqued onto the sloped side of the I-beam.

\$)! ' / ! + 0

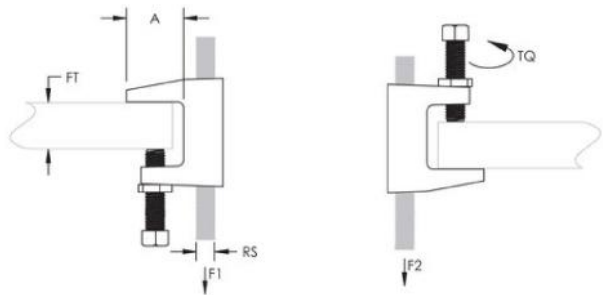

4 ! / ,) , ' ,

nVent products shall be installed and used only as indicated in nVent's product instruction sheets and training materials. Instruction sheets are available at www.nvent.com and from your nVent customer service representative. Improper installation, misuse, misapplication or other failure to completely follow nVent's instructions and warnings may cause product malfunction, property damage, serious bodily injury and death and/or void your warranty.

, A€! ? 9G75
+1.800.753.9221
Option 1 – Customer Care
Option 2 – Technical Support

%FOAB9
Netherlands:
+31 800-0200135
France:
+33 800 901 793

%FOAB9
Germany:
800 1890272
Other Countries:
+31 13 5835404

! . ! #
Shanghai:
+ 86 21 2412 1618/19
Sydney:
+61 2 9751 8500



Our powerful portfolio of brands:
@9@7A? CADDY ERICO HOFFMAN RAYCHEM SCHROFF TRACER