



BH-19

SIGHT CLASS



This device should be installed
On discharge side of drainvalve
(Not for system static pressure)

Optional Finishes:
PB-Polished Brass
RC-Rough Chrome Plated
PC-Polished Chrome Plated

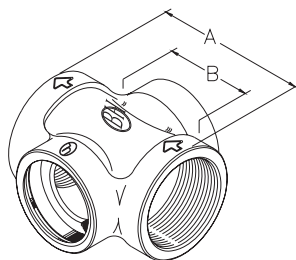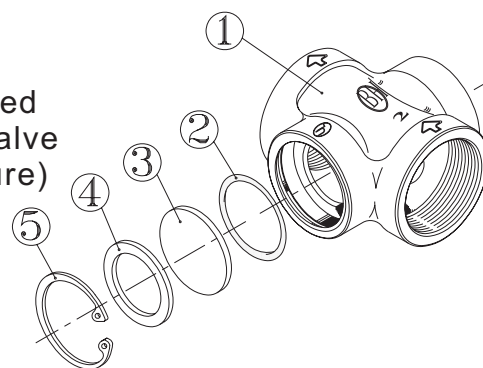

ITEM	DESCRIPTION	MATERIAL	Q'TY
1	BRASS BODY	CASTING BRASS B584 C85700 OR CASTING BRONZE B584 C84400	1
2	O-RING	NBR	2
3	CLEAR PLATE	ACRYLC	2
4	WASHER	BRASS B16	2
5	BUCKLE	STAINLESS STEEL A2	2

STGHT DRAIN WITH RESTRICTED ORIFICE

SIZE	A	B	Orifice Size
1" (25mm)	3 1/4" (82mm)	2 1/4" (50mm)	7/16" - 1/2" - 17/32" min max
1-1/4" (32mm)	3 1/4" (82mm)	2 1/4" (51mm)	7/16" - 1/2" - 17/32" min max
1-1/2" (38mm)	3 1/4" (82mm)	2 1/4" (51mm)	7/16" - 1/2" - 17/32" min max
2" (50mm)	3 3/8" (85mm)	2 1/4" (51mm)	7/16" - 1/2" - 17/32" min max

BH-20

PLUG AND CHAIN




Used on Fire Dept. inlet connec
Prevents entry of foreign matter
protects female threads.

Standard equipment:
Barss plug with male hose three
and attached chain.

Available with pin or rocke

Optional Finishes:
PB-Polished Brass
RC-Rough Chrome Plated
PC-Polished Chrome Plated

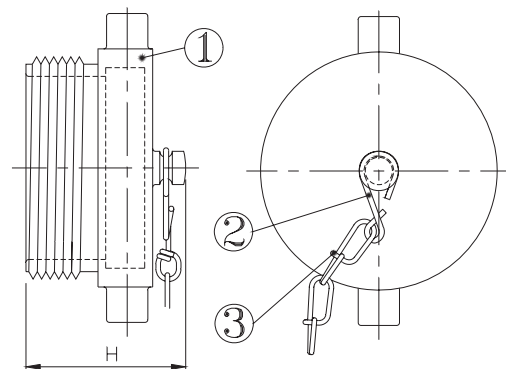

DIMENSIONS Unit: inch

Size	Mark	1 1/2"	2 1/2"
H		1.67	2.22

NO	NOMENCLATUR	MATERIALS	NO	NOMENCLATUR	MATERIALS
1	CAP	1 1/2": ASTM B584 C85700 2 1/2": ASTM B124 C37700	2	SNAP RING	BRASS
			3	CHAIN	BRASS