




Ball Valve (Threaded), Standard Port QB

Technical Features

- Sizes available (Nominal) : DN8/1/4" DN10/3/8", DN15/1/2", DN20/3/4", DN25/1", DN32/1 1/4", DN40/1 1/2", DN50/2" & DN65/2 1/2"
- Pressure data : Working pressure (water) : DN8-DN65 (1/4" - 2 1/2") = 42 bar (600 psi)
- Finish : Brass
- Connections : Female threaded BSP inlet and outlet

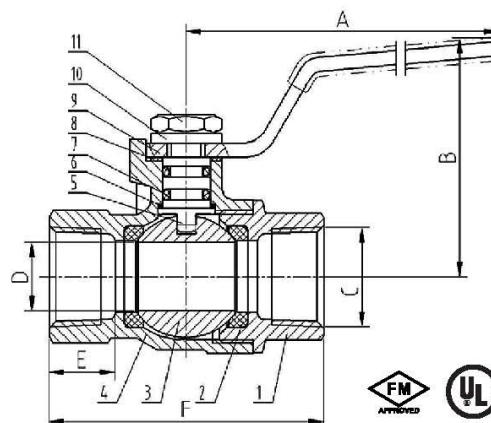

Ball Valve (Threaded) Standard Port - QB

Physical Data

Nominal Pipe Size		Dimensions (mm)			Port Size (mm)	Reference	Weight (kg)
Metric	inch	A	B	C			
DN8	1/4"	42	42	60	8	QB2T700- 05	0.090
DN10	3/8"	48	47	88	10	QB2T700-037	0.155
DN15	1/2"	57	52	90	14	QB2T700-050	0.216
DN20	3/4"	48	42	90	19	QB2T700- 08	0.320
DN25	1"	80	49	115	24	QB2T700- 10	0.550
DN32	1 1/4"	93	76	141	31	QB2T700- 13	0.780
DN40	1 1/2"	95	80	141	38	QB2T700- 15	1.080
DN50	2"	114	90	151	49	QB2T700- 20	1.663
DN65	2 1/2"	140	123	211	64	QB2T700-250*	3.719

* Not UL/FM Approved

Ball Valve - QB

Materials List

Item	Description	Material	Specification
1	Adapter	Forged Brass	HPb59-1
2	Seats	PTFE	Commercial
3	Ball	Chromed Brass	HPb59-1 (Chrome)
4	Body	Forged Brass	HPb59-1
5	Stem	Brass	HPb59-1
6	Washer	PTFE	Commercial
7	O-ring	NBR	Commercial
8	Washer	PTFE	Commercial
9	Handle	Steel	Q235A
10	Spring Washer	Spring Steel	65Mn
11	Handle Nut	Steel	Q235A

