

Style R2S | R2

Recessed Sprinkler Escutcheon

Publication: 17.01EN

The Two-Pieces recessed escutcheon has been widely accepted as the preferred method of finished sprinkler head installation. SureX's recessed escutcheon is available in three standard finishes and two standard thread sizes.


Finishes: Chrome, White Painted, Black Painted, Special.

Thread sizes: 1/2" and 3/4" IPS

Adjustable: 1/2" and 3/4"

Style R2C are available with 1/2"(12.7mm) height.

Model	Thread Specification	Total Height	Adjustment
	Inches mm	Inches mm	Inches mm
R2	1/2	1	3/4
R2	15	25.4	19.05
R2	3/4	1	3/4
R2	20	25.4	19.05
R2S	1/2	3/4	1/2
R2S	15	19.05	12.70
R2S	3/4	3/4	1/2
R2S	20	19.05	12.70

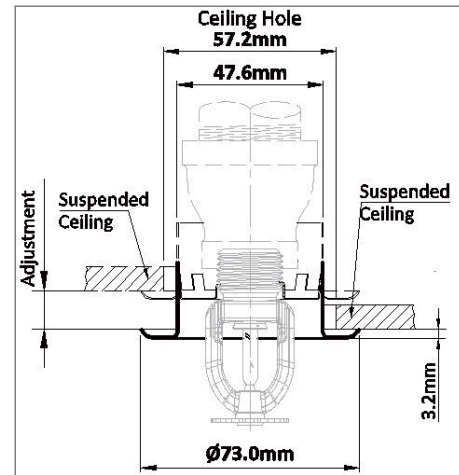

Style R2L

Recessed Sprinkler Escutcheon

Publication: 17.01EN


The Two-Pieces recessed escutcheon has been widely accepted as the preferred method of finished sprinkler head installation. SureX's recessed escutcheon is available in three standard finishes and two standard thread sizes.

Finishes: Chrome, White Painted, Black Painted, Special.

Thread sizes: 1/2" and 3/4" IPS

Adjustable: 1/2" and 3/4"

Model	Thread Specification	Total Height	Adjustment
	Inches mm	Inches mm	Inches mm
R2L	1/2	1 1/2	1 1/4
R2L	15	38.1	31.75
R2L	3/4	1 1/2	1 1/4
R2L	20	38.1	31.75

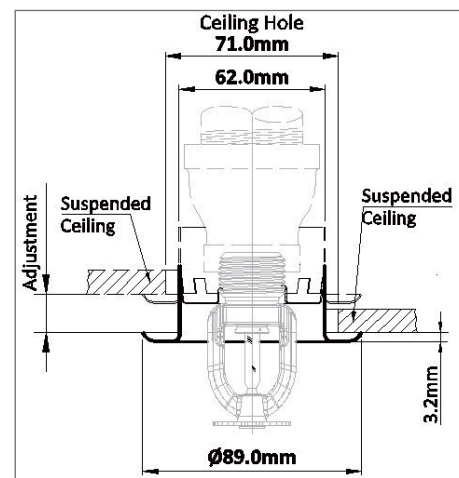

Installation

Proper installation of the recessed sprinkler escutcheon can be accomplished with tools ordinarily found on the job site. The installer must make sure that the face of the reducing coupling must extend to within 3/4" of finished ceiling material but no farther than flush with the finished ceiling. Thread the cup(retainer) by hand all the way on to the sprinkler head threads. Then install the sprinkler into the reducing coupling at the end of the drop nipple according to the sprinkler head manufacturer specifications. The skirt can be installed after the finished ceiling has been completed. Firmly push the skirt over the retainer until the skirt is firmly seated against the finished ceiling. Installation is now complete.



VISION
A VISION COMPANY

VISION INTERNATIONAL | No.221 Jin Lan Rd.,JiaDing Industrial Park,Shanghai P.R. China,Tel:+86-21-5954-5863,Fax:+86-21-5954-3888

www.visionpiping.com

| FIRE PROTECTION SYSTEM | INTERNATIONAL |

NINGBO VISION PIPEFITTING CO.,LTD.,Xiaogang,Xinquan Village,Beilun District,Ningbo,Zhejiang P.R.of China ,Tel:+86-574-8615-6262