




Product size ←

Grooved Concentric Reducer

According to different situation, the appearance can be dealt with epoxy powder, hot-dipped zinc, paint, dacromet or your requirement.

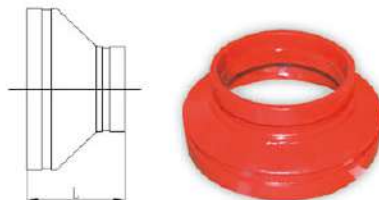

Grooved Concentric Reducer

Nominal Size	Pipe OD	Working Pressure	Dimensions
mm/in	mm/in	psi/Mpa	mm/in
32 × 25	42.4 × 33.7	300Psi 2.07Mpa	64
1 1/4 × 1	1.660 × 1.315		2.51
40 × 25	48.3 × 33.7		64
1 1/2 × 1	1.900 × 1.315		2.51
40 × 32	48.3 × 42.4		64
1 1/2 × 1 1/4	1.900 × 1.660		2.51
50 × 25	60.3 × 33.7		64
2 × 1	2.375 × 1.315		2.51
50 × 32	60.3 × 42.4		64
2 × 1 1/4	2.375 × 1.660		2.51
50 × 40	60.3 × 48.3		64
2 × 1 1/2	2.375 × 1.900		2.51
65 × 25	73.0 × 33.7		64
2 1/2 × 1	2.875 × 1.315		2.51
65 × 32	73.0 × 42.4		64
2 1/2 × 1 1/4	2.875 × 1.660		2.51
65 × 40	73.0 × 48.3		64
2 1/2 × 1 1/2	2.875 × 1.900		2.51
65 × 50	73.0 × 60.3		64
2 1/2 × 2	2.875 × 2.375		2.51
65 × 32	76.1 × 42.4		64
2 1/2 × 1 1/4	3.000 × 1.660		2.51
65 × 40	76.1 × 48.3		64
2 1/2 × 1 1/2	3.000 × 1.900		2.51
65 × 50	76.1 × 60.3		64
2 1/2 × 2	3.000 × 2.375		2.51
80 × 32	88.9 × 42.4		64
3 × 1 1/4	3.500 × 1.660		2.51
80 × 40	88.9 × 48.3		64
3 × 1 1/2	3.500 × 1.900		2.51
80 × 50	88.9 × 60.3		64
3 × 2	3.500 × 2.375		2.51
80 × 65	88.9 × 76.1		64
3 × 2 1/2	3.500 × 3.000		2.51
100 × 65	108.0 × 76.1		76
4 × 2 1/2	4.250 × 3.000		2.99
100 × 80	108.0 × 88.9		76
4 × 3	4.250 × 3.500		2.99
100 × 32	114.3 × 42.4		76
4 × 1 1/4	4.500 × 1.660		2.99

Nominal Size	Pipe OD	Working Pressure	Dimensions
mm/in	mm/in	psi/Mpa	mm/in
100 × 40	114.3 × 48.3	300Psi 2.07Mpa	76
4 × 1 1/2	4.500 × 1.900		2.99
100 × 50	114.3 × 60.3		76
4 × 2	4.500 × 2.375		2.99
100 × 65	114.3 × 76.1		76
4 × 2 1/2	4.500 × 3.000		2.99
100 × 80	114.3 × 88.9		76
4 × 3	4.500 × 3.500		2.99
125 × 50	139.7 × 60.3		89
5 × 2	5.500 × 2.375		3.5
125 × 65	139.7 × 76.1		89
5 × 2 1/2	5.500 × 3.000		3.5
125 × 80	139.7 × 88.9		89
5 × 3	5.500 × 3.500		3.5
125 × 100	139.7 × 114.3		89
5 × 4	5.500 × 4.500		3.5
125 × 50	141.3 × 60.3		89
5 × 2	5.563 × 2.375		3.5
125 × 65	141.3 × 76.1		89
5 × 2 1/2	5.563 × 3.000		3.5
125 × 80	141.3 × 88.9		89
5 × 3	5.563 × 3.500		3.5
125 × 100	141.3 × 114.3		89
5 × 2 1/2	5.563 × 4.500		3.5
150 × 50	159.0 × 60.3		102
6 × 2	6.250 × 2.375		4.01
150 × 65	159.0 × 76.1		102
6 × 2 1/2	6.250 × 3.000		4.01
150 × 80	159.0 × 88.9		102
6 × 3	6.250 × 3.500		4.01
150 × 100	159.0 × 108.0		102
6 × 4	6.250 × 4.250		4.01
150 × 100	159.0 × 114.3		102
6 × 4	6.250 × 4.500		4.01
150 × 125	159.0 × 133.0		102
6 × 5	6.250 × 5.250		4.01
150 × 125	159.0 × 139.7		102
6 × 5	6.250 × 5.500		4.01
150 × 50	165.1 × 60.3		102
6 × 2	6.500 × 2.375		4.01

Nominal Size	Pipe OD	Working Pressure	Dimensions
mm/in	mm/in	psi/Mpa	mm/in
150 × 65	165.1 × 76.1	300Psi 2.07Mpa	102
6 × 2 1/2	6.500 × 3.000		4.01
150 × 80	165.1 × 88.9		102
6 × 3	6.500 × 3.500		4.01
150 × 100	165.1 × 114.3		102
6 × 4	6.500 × 4.500		4.01
150 × 125	165.1 × 139.7		102
6 × 5	6.500 × 5.500		4.01
150 × 50	168.3 × 60.3		102
6 × 2	6.625 × 2.375		4.01
150 × 65	168.3 × 76.1		102
6 × 2 1/2	6.625 × 3.000		4.01
150 × 80	168.3 × 88.9		102
6 × 3	6.625 × 3.500		4.01
150 × 100	168.3 × 114.3		102
6 × 4	6.625 × 4.500		4.01
150 × 125	168.3 × 139.7		102
6 × 5	6.625 × 5.500		4.01
200 × 50	219.1 × 60.3		127
8 × 2	8.625 × 2.375		5
200 × 65	219.1 × 76.1		127
8 × 2 1/2	8.625 × 3.000		5
200 × 80	219.1 × 88.9		127
8 × 3	8.625 × 3.500		5
200 × 100	219.1 × 108.0		127
8 × 4	8.625 × 4.250		5
200 × 100	219.1 × 114.3		127
8 × 4	8.625 × 4.500		5
200 × 125	219.1 × 139.7		127
8 × 5	8.625 × 5.500		5
200 × 150	219.1 × 159.0		127
8 × 6	8.625 × 6.250		5
200 × 150	219.1 × 165.1		127
8 × 6	8.625 × 6.500		5
200 × 150	219.1 × 168.3		127
8 × 6	8.625 × 6.625		5